

VIKING AIR

TYPE LR AIR AND VAPOUR PERMEABLE ROOF UNDERLAY

Wind Uplift
Resistance
Zones 1-4
(345mm batten
gauge)



Protect Viking Air is a new, premium type LR roof underlay with high air and vapour permeability, for use in warm and cold pitched roof constructions, helping to avoid the risk of harmful condensation without the need for additional ventilation as permitted by the NHBC for a cold roof construction. Designed with superior air permeability at 50 Pascals to BS EN 12114, the underlay also achieves wind uplift resistance to Zones 1-4* at 345mm batten gauge to BS 5534, ensuring wide coverage across the UK and throughout Ireland. These qualities make Protect Viking Air best in its class.

** Meets Zones 1-4 without need for additional counter batten or integral tape. Achieves unrestricted use for wind uplift - Zones 1-5 at 310mm batten gauge or when installed on sarking board.*

BENEFITS

- Superior airflow permeability – >78 m³/m²/hr @ 50 Pascals to BS EN 12114, ensuring market leading performance.
 - Hydrophobically treated underlay which provides additional water shedding qualities.
 - Highly vapour permeable with a performance better than required in BS 5250.
 - >1.0m head of water resistance.
 - Does not generate nuisance noise under wind loading.
 - BM TRADA independently certified and CE marked for added reassurance in specification.
 - Leads its class in wind uplift resistance to BS 5534, achieving Zones 1-4 at 345mm batten gauge without the need for extra counter batten or integral tape.
 - Can be wrapped over the ridge for ventilation rather than cut short, reducing the possibility of water ingress at construction stage.
 - Tough and durable, yet easy to cut and handle, with flexibility at low temperatures.
 - No need to seal the underlay overlaps, ensuring fortuitous ventilation.
 - Can be used as a temporary roof covering. ♦
 - Helps to avoid condensation risk within the roofspace in accordance with BS 5250 and NHBC requirements.
 - Can be used in cold roof construction without additional roofspace ventilation as permitted by NHBC.
- ♦ For clarification on exposure times please contact Glidevale Protect's Technical team.

PROTECT VIKING AIR - TYPE LR UNDERLAY

CE marked and independently BM TRADA certified, this UV and heat stabilised polymeric roof underlay incorporates a vapour and air permeable, melt-blown technology core that is hydrophobically treated. This ensures an uninterrupted airflow rate and delivers the required permeability to eliminate the need for roofspace ventilation. The NHBC accepts the use of a water vapour and air permeable underlay in cold roof construction without additional roofspace ventilation.

Protect Viking Air's upper spunbond surface is hydrophobically treated providing water shedding qualities, matched with a robustness to manage the wind load pressures on the roof. This provides a secondary line of defence against wind driven rain and dust ingress.

PRODUCT DESCRIPTION

Size

Roll width: 1.0m or 1.5m
 Roll length: 50m
 Roll total area: 50 or 75m²
 Roll weight: 9 or 13kg

Appearance

Beige upper and white lower surface. Printed with product branding and grid for ease of identification and cutting on site.

Compatibility


As with all air and vapour permeable underlays, do not lay in direct contact with undried timber preservatives (whether water or solvent based).
 Protect OFV Eaves Skirt should be used at all gutter details.



PERFORMANCE

| | MD | CD |
|---|--|-----|
| Nail tear strength (N) to EN 12310-1 with mods | 235 | 266 |
| Unaged tensile strength (N/50mm) to EN 12311 with mods | 270 | 230 |
| Aged tensile strength (N/50mm) to EN 12311 with mods | 240 | 200 |
| Air permeability (m ³ /m ² /hr) to BS EN 12114 | 78.71 @ 50 Pascals | |
| Water vapour resistance to BS EN ISO 12572 | 0.04 MNs/g / 0.008 S _d (m) | |
| Resistance to water penetration to EN 1928 modified by EN 13859-1 (watertightness) | Pass Class W1 >1.0m hydrostatic head resistance | |
| Wind uplift resistance Zones 1-4 (at 345mm batten gauge) and 600mm rafter centres | | |
| Weight | 159gsm | |
| Flexibility at low temperature | -40°C | |
| MD = machine direction (along roll), CD = cross direction (across roll). UV and heat ageing conditions: UVA lamps at 50°C for 336 hours followed by heat ageing at 70°C for 90 days. | | |

Wind Uplift Resistance Map (345mm batten gauge)

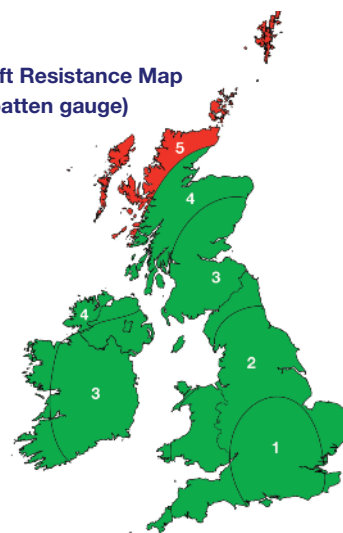

Meets Zones 1-4 at 345mm batten gauge (resistance to wind pressure 1569 Pa) without the need for additional counter batten or integral tape. Achieves unrestricted use for wind uplift - Zones 1-5 at 310mm batten gauge (2121 Pa) or when installed on sarking board.

Related products


- Protect Fulmetal RediRoll:
protectmembranes.com/rediroll
- Protect OFV Eaves Skirt:
protectmembranes.com/eavesskirt
- Protect VC Foil Ultra Air and Vapour Control Layer membrane:
protectmembranes.com/vcfoilultra

WARM AND COLD PITCHED ROOFING APPLICATIONS


Protect Viking Air's high performance in air and vapour permeable technology ensures that additional ventilation is not required for either warm or cold pitched roofs.**

As well as ensuring key ventilation requirements are met, Protect Viking Air helps to ensure condensation control, allowing air and water vapour to escape into the atmosphere via the roof covering. Most concrete and clay roof tiles are sufficiently air permeable but if an air tight

roof covering is used such as fibre cement slates or metal tiles, it would be necessary to ventilate the batten space. 25mm counter battens should be used above the underlay and ventilation provided - 25,000mm²/m at eaves or low level and 5,000mm²/m at ridge or high level.

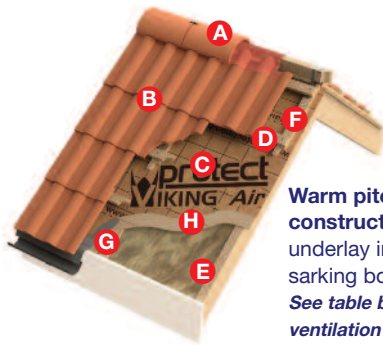

Warm pitched roof construction with roofing underlay installed on sarking board.
See table below for ventilation requirements.

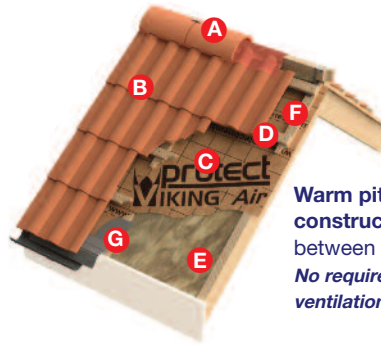

Warm pitched roof construction with insulation between or above the rafters.
No requirement for additional ventilation.

- A** Dry fix ridge system
- B** Roof tile covering
- C** Protect Viking Air
- D** Tile batten
- E** Insulation
- F** Counter batten
- G** Protect OFV Eaves Skirt
- H** Sarking board

WARM ROOFS

| Roof pitch detail | Sarking type | Ventilation requirements |
|-------------------|-----------------------------|--|
| All roof pitches | Open jointed sarking planks | No additional ventilation requirements when used with Protect Viking Air |
| All roof pitches | Closed jointed sarking | Ventilation beneath underlay and above insulation of 25,000mm ² /m at eaves or low level and 5,000mm ² /m at ridge or high level. Space between underlay and insulation at least 50mm deep |

Specification clause

Air and vapour permeable roofing underlay to be Protect Viking Air supplied by Glidevale Protect, 2 Brooklands Road, Sale, Cheshire, M33 3SS.
T: +44 (0)161 905 5700.
F: +44 (0)161 905 2085.
E: info@glidevaleprotect.com.
BM TRADA certified and CE marked underlay to be of triple ply construction with a weight of 159gsm. Underlay to incorporate a hydrophobically treated melt-blown technology core to ensure water tightness and air and vapour permeability, protected between two layers of non-woven spunbond material. Air permeability to be 78.71 @ 50 Pascals (m³/m²/hr) to BS EN 12114. Upper spunbond surface to be hydrophobically treated for additional water shedding qualities. Underlay to achieve a hydrostatic head of >1.0m. Water vapour transmission resistance:
0.04 MNs/g / 0.008 S_d(m) to BS EN ISO 12572.
Resistance to wind uplift: suitable for use in Zones 1-4 (at 345mm batten gauge). Underlay to be laid in accordance with BS 5534 and manufacturer's instructions.



Cold pitched roof construction with roofing underlay installed on sarking board.
See table below for ventilation requirements.



Cold pitched roof construction with insulation between floor joists.
No requirement for additional ventilation.

COLD ROOFS

| Roof pitch detail | Sarking type | Ventilation requirements |
|--|-----------------------------|---|
| All roof pitches | Open jointed sarking planks | No additional ventilation requirements when used with Protect Viking Air |
| Above 35°, mono-pitch or lean-to roof where span is in excess of 10m | Closed jointed sarking | 5,000mm ² /m at ridge or high level and 10,000mm ² /m at eaves or low level |
| 12.5 - 15° ♦♦ | Closed jointed sarking | 25,000mm ² /m at eaves or low level |

♦♦ Subject to tile manufacturer's minimum pitch

** For all roof types mentioned, a well-sealed ceiling / separate air and vapour control layer on warm side of insulation is recommended, where this is achievable. Glidevale Protect's Technical team can advise on all ventilation requirements for any roof type or pitch. Please contact technical@glidevaleprotect.com or call +44 (0)161 905 5700.



A COMPREHENSIVE CHOICE OF ROOFING UNDERLAYS

Whatever your pitched roofing project, Glidevale Protect's broad collection of underlays has it covered. Providing the complete solution for all types of slate or tile roofs to meet the key requirements of water tightness, strong wind uplift resistance and condensation control, Glidevale Protect gives unrivalled choice in specification and complete peace of mind.

Vapour Permeable & Airtight (Type LR)

Protect VP400 Plus LR
Protect Zytec
Protect VP300

Impermeable & Airtight (Type HR)

Protect A1T3 Plus
Protect A1
Protect Wunderlay

Air & Vapour Permeable (Type LR)

Protect Viking Air

ROOFING VENTILATION RANGE

Suitable for all tile and slate roofs, the wide array of Glidevale Protect ventilation products helps reduce the condensation risk for the full cold or warm roof structure, delivering the required airflow requirements when used in conjunction with roofing underlays.

The collection includes:

G Range Slate & Tile Ventilators

In-Line® Slate, Tile & Ridge Ventilators

Universal In-Line® Slate & Tile Ventilators

Versa-Tile G5 Ventilator/Terminal

RV Rafter Ventilators

Fascia Ventilators

Soffit Ventilators

Abutment Ventilator

Monovent (Lean to Roof) Ventilator

Fulmetal RediRoll Ventilated

Dry Ridge/Hip system

ROOFING ACCESSORIES RANGE

A full package of roofing accessories for all tile and slate roofs is also available, designed to complement the roofing product collection and offering an ideal alternative to traditional products.

The range includes:

AluFlash lead-free alternative flashing

Universal Dry Verge Systems for slates and interlocking tiles

Universal Dry Fix Valley Trough

Universal Valley Trough

Universal Bonding Strip

OFV Eaves Skirt & Eaves Comb

Solar Inlet Terminal

CONSTRUCTION DIVISION

A whole range of product options to cover ground to roof is also available from Glidevale Protect's Construction Division. This includes a range of external wall membranes, internal airtightness and vapour control membranes for walls, floors and ceilings, sealing tapes, cavity trays, underfloor and cavity wall ventilation, intelligent passive stack ventilation - iPSV®, trickle vents, loft access hatches and radon protection.

Glidevale Protect has it covered.

For more information, visit our websites at:
glidevale.com
protectmembranes.com

For further, detailed technical advice please contact the Glidevale Protect Technical team at: technical@glidevaleprotect.com

Stockist's stamp

GLIDEVALE PROTECT

2 Brooklands Road, Sale, Cheshire M33 3SS
T: +44 (0)161 905 5700 F: +44 (0)161 905 2085
E: info@glidevaleprotect.com
W: glidevale.com protectmembranes.com

Glidevale Protect maintains a policy of continuous development and reserves the right to amend product specifications without notice.



A division of Building Product Design Ltd. Company Registration No: 3944123

