

## DECLARATION OF PERFORMANCE

### No. DOP GREYS 01.

1. Unique identification code of the product-type: **Reproduction Stone Slate**
2. Type, batch or serial number of the construction product: **See Product Label**
3. Intended use or uses of the construction product, in accordance with the applicable designated technical - specification, as foreseen by the manufacturer:

### Fibre-cement slates for roofing

4. Name, registered trade name or registered trade mark and contact address of the manufacturer:

### Greys Artstone Limited

**Burdwell Works, New Mill Road, Brockholes, Holmfirth, West Yorkshire, HD9 7AZ, UK**

5. System of AVCP of the construction product as set out in Annex V: 3
- 5b. Name and identification number of the notified body (in case of the declaration of performance concerning a construction product covered by a designated standard): **Lucideon Limited**  
Notified body number 1298, Queens Road, Penkhull, Stoke-on-Trent, Staffordshire ST4 7LQ

6. In case of the declaration concerning a construction product covered by a designated standard:

### EN492 : 2012 + A2:2018

**The manufacturer has implemented Factory Production Controls (FPC) and has performed Type testing/calculations on the product.**

7. Declared performance

ESSENTIAL CHARACTERISTICS	PERFORMANCE	HARMONISED TECHNICAL SPEC
Mechanical resistance	Pass 180-166 Nm/m	EN 492
External fire performance	Broof (deemed to satisfy)	EN 492
Reaction to fire Class	Class A2-sl,d0	EN 492
Water permeability	Complies to section 7.3.3	EN 492
Dimensional variations	15mm - 18mm	EN 492
Release of dangerous substances	Pass	EN 492
Durability against warm water	RL ≥ 0.75.	EN 492
Durability against soak/dry	RL ≥ 0.75.	EN 492
Durability against freeze-thaw	RL ≥ 0.75.	EN 492
Durability against heat-rain	Pass	EN 492


8. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 7. This DOP is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Name and Function: **Lee Johnson, Director Greys Artstone Ltd**

Place of issue: **Huddersfield**

Date of issue: **30th November 2022**

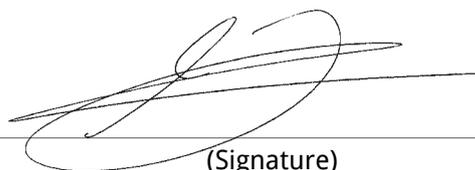

(Signature)

## DECLARATION OF PERFORMANCE

### No. DOP GREYS 02.

1. Unique identification code of the product-type: **Reproduction Slate**
2. Type, batch or serial number of the construction product: **See Product Label**
3. Intended use or uses of the construction product, in accordance with the applicable designated technical - specification, as foreseen by the manufacturer:

### Fibre-cement slates for roofing

4. Name, registered trade name or registered trade mark and contact address of the manufacturer:

### Greys Artstone Limited

**Burdwell Works, New Mill Road, Brockholes, Holmfirth, West Yorkshire, HD9 7AZ, UK**

5. System of AVCP of the construction product as set out in Annex V: 3
- 5b. Name and identification number of the notified body (in case of the declaration of performance concerning a construction product covered by a designated standard): **Lucideon Limited**  
Notified body number 1298, Queens Road, Penkull, Stoke-on-Trent, Staffordshire ST4 7LQ

6. In case of the declaration concerning a construction product covered by a designated standard:

### EN492 : 2012 + A2:2018

**The manufacturer has implemented Factory Production Controls (FPC) and has performed Type testing/calculations on the product.**

7. Declared performance

ESSENTIAL CHARACTERISTICS	PERFORMANCE	HARMONISED TECHNICAL SPEC
Mechanical resistance	Pass 180-166 Nm/m	EN 492
External fire performance	B <sub>Roof</sub> (deemed to satisfy)	EN 492
Reaction to fire Class	Class A2-sl,d0	EN 492
Water permeability	Complies to section 7.3.3	EN 492
Dimensional variations	4mm – 6mm	EN 492
Release of dangerous substances	Pass	EN 492
Durability against warm water	RL ≥ 0.75.	EN 492
Durability against soak/dry	RL ≥ 0.75.	EN 492
Durability against freeze-thaw	RL ≥ 0.75.	EN 492
Durability against heat-rain	Pass	EN 492

8. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 7. This DOP is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Name and Function: **Lee Johnson, Director Greys Artstone Ltd**

Place of issue: **Huddersfield**

Date of issue: **30th November 2022**



(Signature)

## DECLARATION OF PERFORMANCE

### No. DOP GREYS 03.

1. Unique identification code of the product-type: **Reproduction Stone Ridge**
2. Type, batch or serial number of the construction product: **See Product Label**
3. Intended use or uses of the construction product, in accordance with the applicable designated technical - specification, as foreseen by the manufacturer:

### Fibre-cement slates for roofing

4. Name, registered trade name or registered trade mark and contact address of the manufacturer:

### Greys Artstone Limited

**Burdwell Works, New Mill Road, Brockholes, Holmfirth, West Yorkshire, HD9 7AZ, UK**

5. System of AVCP of the construction product as set out in Annex V: 3
- 5b. Name and identification number of the notified body (in case of the declaration of performance concerning a construction product covered by a designated standard): **Lucideon Limited**  
Notified body number 1298, Queens Road, Penkhull, Stoke-on-Trent, Staffordshire ST4 7LQ

6. In case of the declaration concerning a construction product covered by a designated standard:

### EN492 : 2012 + A2:2018

**The manufacturer has implemented Factory Production Controls (FPC) and has performed Type testing/calculations on the product.**

7. Declared performance

ESSENTIAL CHARACTERISTICS	PERFORMANCE	HARMONISED TECHNICAL SPEC
Mechanical resistance	Pass 180-166 Nm/m	EN 492
External fire performance	Broof (deemed to satisfy)	EN 492
Reaction to fire Class	Class A2-sl,d0	EN 492
Water permeability	Complies to section 7.3.3	EN 492
Dimensional variations	26mm – 29mm	EN 492
Release of dangerous substances	Pass	EN 492
Durability against warm water	RL ≥ 0.75.	EN 492
Durability against soak/dry	RL ≥ 0.75.	EN 492
Durability against freeze-thaw	RL ≥ 0.75.	EN 492
Durability against heat-rain	Pass	EN 492

8. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 7. This DOP is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Name and Function: **Lee Johnson, Director Greys Artstone Ltd**

Place of issue: **Huddersfield**

Date of issue: **30th November 2022**



(Signature)