



**NON-COMBUSTIBLE**  
**A2-s1, d0**



**INSULATING,**  
**BREATHABLE**  
**MEMBRANE**



- ✓ Non-combustible A2-s1, d0\*
- ✓ Excellent thermal insulation
- ✓ Super thin: only 13mm
- ✓ Watertight, airtight and soundproof properties
- ✓ Quick and easy installation


*\*To harmonised standard EN 13501*



# Skytech® PRO XL

For use on all types of domestic and commercial walling, facade, thatch and roofing applications.

Fire Rating	A2-s1, d0
Water vapour permeability	Sd value: 0.041m (0.25 MNs/g)
Water tightness	W1
Sound reduction	-16db (alone)
Tensile strength (L x T)	630 x 630 N/50mm
Resistance to tearing (L x T)	275 x 280 N
Thermal resistance (R)	1.7 m <sup>2</sup> K/W (U=0.59 W/m <sup>2</sup> K)
U-value (Skytech PRO XL only)	0.59 W/m <sup>2</sup> K
Thermal conductivity	0.029 W/mK
Emissivity / Reflectivity	5% / 95%
Features	Integrated adhesive strip
Roll size	1.12m x 18m (20m <sup>2</sup> )
Weight	25kg
Pallet size	12 rolls

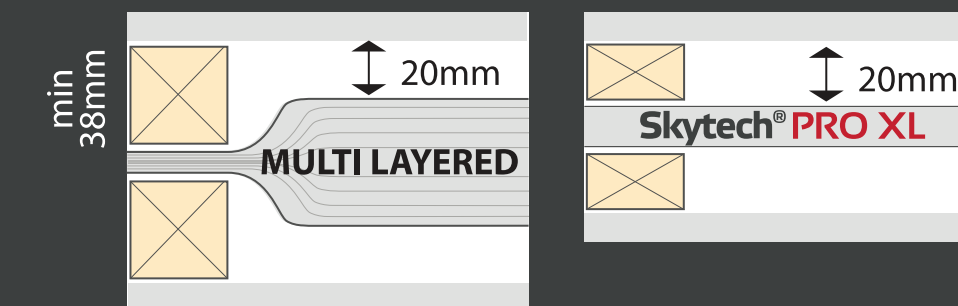

Skytech PRO XL does not expand and only requires a 20mm air gap/batten.

Skytech PRO XL can even be installed directly on additional insulation and in some applications it can be installed without any battens.

U-value calculations on building projects installing **Skytech® PRO XL** are available upon request.