


Rosemary Clay Classic

Produced from the finest clays, Rosemary is offered in a range of weathered, brindled and single colours.

KEY ADVANTAGES

- BMI Redland Rosemary brand synonymous with clay plain tiles
- Smooth and sanded finishes
- Mellows naturally with age

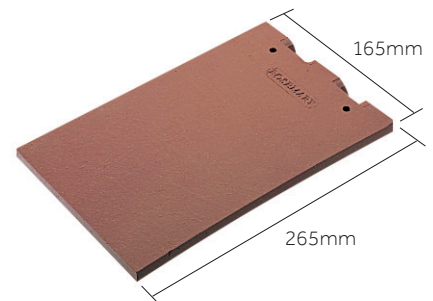

PRODUCT DATA

Size (overall)	265 x 165mm
Minimum Pitch	35°
Maximum Pitch (subject to fixing specification)	90°
Minimum headlap	below 90° 65mm / at 90° 35mm
Maximum headlap	88mm
Minimum Gauge/Batten Spacing	88mm
Maximum Gauge/Batten Spacing	below 90° 100mm / at 90° 115mm
Hanging Length (approx.)	254mm
Cover (all figures are net and do not allow for wastage)	
Linear cover of 1 tile	165mm
Covering capacity	below 90° 60 tiles/m ² / at 90° 52 tiles/m ²
Weight (at max. gauge approx.)*	below 90° 77kg/m ² / at 90° 67kg/m ²
per pallet, including pallet (approx.)	1.10tonnes
per 1000	1.29 tonnes
Battens Required (at max. gauge)	below 90° 10.0m/m ²
Batten Size	
Rafter centres up to 600mm	38 x 25mm
Nail Size for Tiles**	40 x 2.65mm (A/A)
Pallet Quantities	Tiles per pallet 840 / tiles per pack 14 / packs per pallet 60

*All weights nominal ** (A/A) Aluminium Alloy



FITTINGS & ACCESSORIES

ORNAMENTAL TILE

Club Tile

ANGLES

External Angles
Internal Angles

HIP PRODUCTS

Universal Bonnet Hips
Arris Hips
Third Round Hip
Baby Ridge
Dry Hip
Rapid Hip

RIDGE PRODUCTS

Half Round Ridge

VENTILATION SYSTEMS

RedVent EavesVent
RedVent 25 Over-Fascia Vent
Rapid EavesVent
Top Edge Abutment Ventilation
DryVent Ridge
Rapid Vented Ridge
RedLine Ventilation Tile



Rosemary Clay Classic Product Codes

TILES

Standard Tile As per colour	
Rosemary Red	6501
Rosemary Russet Mix	6701
Rosemary Light, Medium Mixed & Blue Brindle	6801
Rosemary Burnt Blend / Dark Antique	6601
Rosemary Heather Brindle	6601
Eaves/Top Tile As per colour	
Rosemary Red	6504
Rosemary Russet Mix	6704
Rosemary Light, Medium Mixed & Blue Brindle	6804
Rosemary Burnt Blend / Dark Antique	6604
Rosemary Heather Brindle	6604
Tile-and-a-half As per colour	
Rosemary Red	6509
Rosemary Russet Mix	6709
Rosemary Light, Medium Mixed & Blue Brindle	6809
Rosemary Burnt Blend / Dark Antique	6609
Rosemary Heather Brindle	6609
UNDERLAYS	
Spiritech 400 2S underlay	9202
Divoroll Elite 2S	9157
Divoroll Universal 2S	9156
EAVES PRODUCTS	
RedVent EavesVent 350-450mm (6m)	9189
RedVent EavesVent 450-600mm (6m)	9190
Extension Trays 350-450mm (6m)	9498
Extension Trays 450-600mm (6m)	9499
Rapid EavesVent 2-in-1 Tray	9988
Rapid EavesVent Rafter Roll (6m)	9984
RedVent 25 Over-Fascia Vent (6m)	9593
Underlay Support Tray (1.5m)	9076

HIP PRODUCTS

Dry Hip (2.7m)	
Continuous Hip (5m)	
Uni-Vent Rapid Ridge/Hip (10m)	
Uni-Vent Rapid Hip Support Tray (1.2m)	
Third Round Hip/Ridge Junction	
Bonnet Hip Tile 35°-50°	
Arris Hip 35°	
Arris Hip 40°	
Arris Hip 45°	
Arris Hip 50°	
Third Round Hip (without nail holes)	
Third Round Hip (with nail holes)	
Hip Iron	
Baby Ridge	
Mortar Bedded Fixing Kit	
Hip End Cap Third Round	

VALLEY PRODUCTS

Angular Valley Tile 35°	8431
Angular Valley Tile 40°-50°	8437
GRP 125 Valley (3m)	9595
Dry Valley (3m)	9574

ABUTMENT PRODUCTS

Top Edge Abutment Ventilation Pack (3m)	9548
Wakaflex Rapid Flashing	
Bonding Gutter (3m)	9578

RIDGE PRODUCTS

DryVent Ridge (1.8m)	9056
Half Round Ridge	8450
Mortar Bedded Fixing Kit	9314

VENTILATION TILES


RedLine Plain Tile Vent	9119
RedLine Vent Adaptor	9175
Flexible Pipe (100 to 100mm)	9172

EXTERNAL VERTICAL ANGLES

External Angle 90° LH	8441
External Angle 90° RH	8440

FIXING

Tile Nail (1596)	9331
Kro-Clip (50)	9142

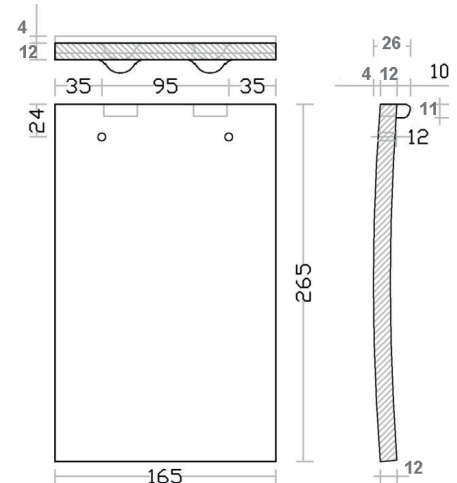

BMI UK & Ireland
 BMI House,
 2 Pitfield, Kiln Farm,
 Milton Keynes, MK11 3LW
 +44 (0) 3705 601000

www.bmigroup.com/uk

We are committed to continuously enhancing and improving our product range. We reserve the right to change our product specifications. We reserve the right to correct any typographical or clerical error or omission. For the latest information contact customer service.