

OVER FASCIA SLIDE & LOCK VENT

Over fascia vents allow a constant flow of air into the roof void between the felt and fascia board. They allow quick installation with continual ventilation.


AVAILABLE IN:

10mm (10696198) suitable for conventional cold roofs


25mm (10696197) suitable for warm roofs, flat roofs & for roof pitches below 15°

INSTALLATION


The over fascia vents should be positioned directly on top of and fixed to the fascia board through the nail holes using corrosion resistant nails. The subsequent units should be fixed together and continuously along the eaves.

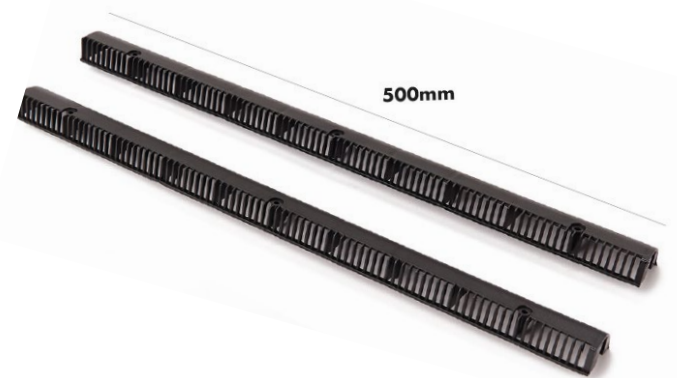

10mm Slide & Lock Vent

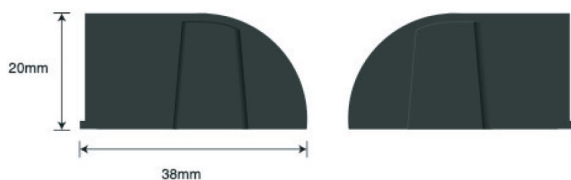

25mm Slide & Lock Vent

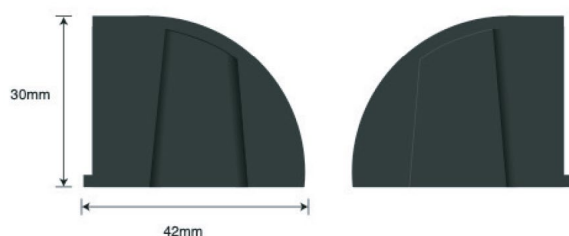**PRODUCT CODE:** 10696198

LENGTH: Each length is 500mm long and secure together to create a 1000mm unit.

MATERIAL: Polypropylene

STANDARDS:

- Conforms to BS 5250: For Roof Space Ventilation (Management and Moisture in Buildings)

VENTILATION AREA: 10,000mm²

BOX QUANTITY: 60

PRODUCT CODE: 10696197

LENGTH: Each length is 500mm long and secure together to create a 1000mm unit.

MATERIAL: Polypropylene

STANDARDS:

- Conforms to BS 5250: For Roof Space Ventilation (Management and Moisture in Buildings)

VENTILATION AREA: 25,000mm²

BOX QUANTITY: 50